


Drywall Track (DWT)

Drywall Track is used to provide premier perimeter support for wall assemblies. Standard gage Drywall Track is furnished with hemmed flanges while 20 gage track is furnished un-hemmed.

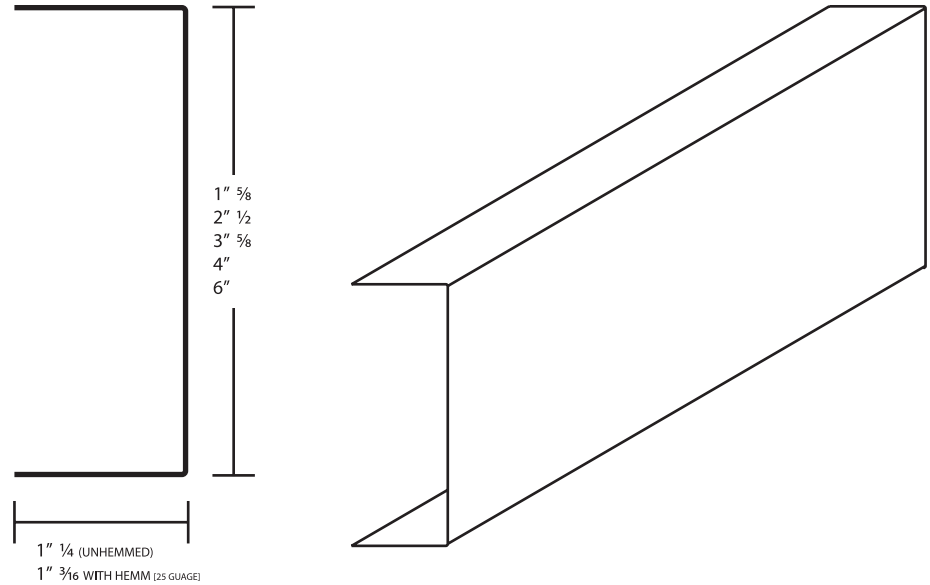

DRYWALL TRACK

Web (in)	PHYSICAL					GROSS					EFFECTIVE 33KSI					TORSIONAL				
	Gauge	Flange (in)	Lip (in)	Area (in ²)	Weight (lb/ft)	I _{xx} (in ⁴)	S _{xx} (in ³)	R _x (in)	I _{yy} (in ⁴)	R _y (in)	I _{xx} (in ⁴)	S _{xx} (in ³)	Ma (in ^{-k})	Va (lb)	Ycg (in)	Jx1000 (in ⁴)	Cw (in ⁶)	Xo (in)	Ro (in)	β
1-5/8	20	1-1/4	3/16	0.132	0.447	0.061	0.075	0.681	0.026	0.441	0.060	0.063	1.236	543	0.874	0.043	0.014	-1.046	1.324	0.376
1-5/8	25	1-1/4	3/16	0.080	0.273	0.038	0.046	0.686	0.016	0.447	0.034	0.033	0.648	302	0.924	0.009	0.009	-1.060	1.340	0.374
2-1/2	20	1-1/4	3/16	0.159	0.540	0.161	0.129	1.008	0.030	0.433	0.159	0.110	2.172	832	1.329	0.052	0.036	-0.915	1.429	0.590
2-1/2	25	1-1/4	3/16	0.097	0.329	0.099	0.079	1.014	0.019	0.439	0.089	0.060	1.164	258	1.391	0.011	0.023	-0.930	1.444	0.585
3-5/8	20	1-1/4	3/16	0.194	0.660	0.381	0.210	1.402	0.033	0.415	0.375	0.184	3.612	794	1.906	0.063	0.084	-0.794	1.664	0.772
3-5/8	25	1-1/4	3/16	0.118	0.401	0.234	0.129	1.409	0.021	0.421	0.215	0.090	1.776	173	2.075	0.014	0.053	-0.807	1.677	0.768
4	20	1-1/4	3/16	0.206	0.700	0.481	0.203	1.529	0.034	0.409	0.473	0.210	4.152	715	2.098	0.068	0.105	-0.761	1.756	0.812
4	25	1-1/4	3/16	0.125	0.425	0.294	0.147	1.536	0.021	0.414	0.273	0.099	1.956	156	2.325	0.015	0.066	-0.774	1.769	0.809
6	20	1-1/4	3/16	0.268	0.920	1.275	0.425	2.181	0.038	0.376	1.218	0.315	6.216	468	3.406	0.087	0.270	-0.625	2.300	0.926
6	25	1-1/4	3/16	0.162	0.550	0.771	0.257	2.184	0.023	0.379	NA	NA	NA	NA	NA	0.019	0.168	-0.639	2.307	0.923

* Web height to thickness ratio (h/t) exceeds 200. Components require web stiffeners at support and concentrated loads.